

This Page Is Inserted by IFW Operations
and is not a part of the Official Record

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images may include (but are not limited to):

- BLACK BORDERS
- TEXT CUT OFF AT TOP, BOTTOM OR SIDES
- FADED TEXT
- ILLEGIBLE TEXT
- SKEWED/SLANTED IMAGES
- COLORED PHOTOS
- BLACK OR VERY BLACK AND WHITE DARK PHOTOS
- GRAY SCALE DOCUMENTS

IMAGES ARE BEST AVAILABLE COPY.

**As rescanning documents *will not* correct images,
please do not report the images to the
Image Problem Mailbox.**



INVESTOR IN PEOPLE

The Patent Office
Concept House
Cardiff Road
Newport
South Wales
NP10 8QQ

I, the undersigned, being an officer duly authorised in accordance with Section 74(1) and (4) of the Deregulation and Contracting Out Act 1994, to sign and issue certificates on behalf of the Comptroller-General, hereby certify that annexed hereto is a true copy of the documents as originally filed in connection with the patent application identified therein together with the Statement of inventorship and of right to grant of a Patent (Form 7/77), which was subsequently filed.

In accordance with the Patents (Companies Re-registration) Rules 1982, if a company named in this certificate and any accompanying documents has re-registered under the Companies Act 1980 with the same name as that with which it was registered immediately before re-registration save for the substitution as, or inclusion as, the last part of the name of the words "public limited company" or their equivalents in Welsh, references to the name of the company in this certificate and any accompanying documents shall be treated as references to the name with which it is so re-registered.

In accordance with the rules, the words "public limited company" may be replaced by p.l.c., plc, P.L.C. or PLC.

Re-registration under the Companies Act does not constitute a new legal entity but merely subjects the company to certain additional company law rules.

Signed


Dated 20 April 2004



44

Request for grant of a patent

(See the notes on the back of this form. You can also get an explanatory leaflet from the Patent Office to help you fill in this form)

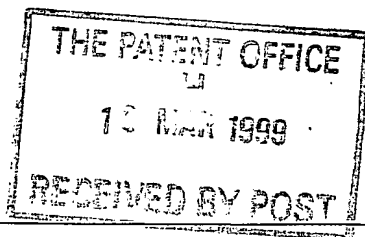

The Patent Office

Cardiff Road
Newport
Gwent NP9 1RH

1. Your reference

P50815 GB

2. Patent application number

(The Patent Office will fill in this part)

9906066.7

3. Full name, address and postcode of the or of each applicant (*underline all surnames*)

Dubois Limited,
5 Princewood Road,
Earlstrees Industrial Estate North,
Corby, Northants. NN17 4AP.

Patents ADP number (*if you know it*)

If the applicant is a corporate body, give the country/state of its incorporation

UK

7 269467001

4. Title of the invention

Apparatus for holding a compact disk

5. Name of your agent (*if you have one*)

Fry, Heath & Spence

"Address for service" in the United Kingdom to which all correspondence should be sent (*including the postcode*)

The Old College,
53 High Street,
Horley,
Surrey RH6 7BN.

Patents ADP number (*if you know it*)

5880273003

6. If you are declaring priority from one or more earlier patent applications, give the country and the date of filing of the or of each of these earlier applications and (*if you know it*) the or each application number

Country

Priority application number
(*if you know it*)

Date of filing
(*day / month / year*)

7. If this application is divided or otherwise derived from an earlier UK application, give the number and the filing date of the earlier application

Number of earlier application

Date of filing
(*day / month / year*)

8. Is a statement of inventorship and of right to grant of a patent required in support of this request? (*Answer 'Yes' if:*

yes

- a) any applicant named in part 3 is not an inventor, or
 - b) there is an inventor who is not named as an applicant, or
 - c) any named applicant is a corporate body.
- See note (d))

Patents Form 1/77

9. Enter the number of sheets for any of the following items you are filing with this form.
Do not count copies of the same document

Continuation sheets of this form

Description 12

Claim(s) 4

Abstract -

Drawing(s) 5 + 5

10. If you are also filing any of the following, state how many against each item.

Priority documents -

Translations of priority documents -

Statement of inventorship and right to grant of a patent (Patents Form 7/77) -

Request for preliminary examination and search (Patents Form 9/77) 1

Request for substantive examination (Patents Form 10/77) -

Any other documents -
(please specify)

11. I/We request the grant of a patent on the basis of this application.

Signature

S. G. Unwin

Date 17.3.99

12. Name and daytime telephone number of person to contact in the United Kingdom

S. G. Unwin


01865 841060

Warning

After an application for a patent has been filed, the Comptroller of the Patent Office will consider whether publication or communication of the invention should be prohibited or restricted under Section 22 of the Patents Act 1977. You will be informed if it is necessary to prohibit or restrict your invention in this way. Furthermore, if you live in the United Kingdom, Section 23 of the Patents Act 1977 stops you from applying for a patent abroad without first getting written permission from the Patent Office unless an application has been filed at least 6 weeks beforehand in the United Kingdom for a patent for the same invention and either no direction prohibiting publication or communication has been given, or any such direction has been revoked.

Notes

- If you need help to fill in this form or you have any questions, please contact the Patent Office on 0645 500505.
- Write your answers in capital letters using black ink or you may type them.
- If there is not enough space for all the relevant details on any part of this form, please continue on a separate sheet of paper and write "see continuation sheet" in the relevant part(s). Any continuation sheet should be attached to this form.
- If you have answered 'Yes' Patents Form 7/77 will need to be filed.
- Once you have filled in the form you must remember to sign and date it.
- For details of the fee and ways to pay please contact the Patent Office.



7/77

**Statement of inventorship and of
 right to grant a patent**

The Patent Office

Cardiff Road
 Newport
 Gwent NP9 1RH

1. Your reference P50815GB

2. Patent application number 9906066.7
 (if you know it)

3. Full name of the or of each applicant
 Dubois Limited

4. Title of the invention
 Apparatus for holding a compact disk

5. State how the applicant(s) derived the right
 from the inventor(s) to be granted a patent
 By virtue of employment of the inventors and Section 39
 (1) (b) of the Patents Act 1977.

6. How many, if any, additional Patent Forms
 7/77 are attached to this form? 3
 (see note (c))

7. I/We believe that the person(s) named over the page (and on
 and any extra copies of this form) is/are the inventor(s) of the invention
 which the above patent application relates to.
 Signature S.G. Unwin Date 5.1.00

8. Name and daytime telephone number of S G Unwin
 person to contact in the United Kingdom 01865 841 060

Notes

- a) If you need help to fill in this form or you have any questions, please contact the Patent Office on 01645 500505.
- b) Write your answers in capital letters using black ink or you may type them.
- c) If there are more than three inventors, please write the names and addresses of the other inventors on the back of another Patents Form 7/77 and attach it to this form.
- d) When an application does not declare any priority, or declares priority from an earlier UK applicaiton, you must provide enough copies of this form so that the Patent Office can send one to each inventor who is not an applicant.
- e) Once you have filled in the form you must remember to sign and date it.

Patents Form 7/77

Enter the full names, addresses and postcodes of the inventors in the boxes and underline the surnames

Anthony Henry Joseph Fraser
Keepers Cottage,
Deere Road
Corby
Northants
NN17 3AB
UK

Patents ADP number (if you know it): 7625866001

Stefan Alexander Pijanowski
25 Clifton Drive
Oundle
Northants
UK

Patents ADP number (if you know it): 7812506001

Peter Anthony Farrer
8 Harvest Croft
Burley in Wharfedale
Ilkley
Leeds
LS29 7LY

Patents ADP number (if you know it): 7812514001

Reminder

Have you signed the form?

APPARATUS FOR HOLDING A COMPACT DISK

This invention relates to apparatus for holding a compact disk.

The invention relates to further improvements of the apparatus described in WO-A-96/14636 and WO-A-97/41563 . The disclosure of this prior art is hereby incorporated in the present specification. Such known apparatus comprises a base portion, inwardly extending radial arms resiliently cantilevered from the base portion and disk-engaging means at the inner ends of the arms for releasably engaging the central hole of the disk. The invention aims to improve upon the release action of the disk-engaging means and enable the thickness of the apparatus, from the upper surface of the disk-engaging means to the underside of the base portion, to be reduced.

According to a first aspect of the invention, there is provided apparatus for holding a compact disk having a central hole, the apparatus comprising: a base portion; at least one inwardly extending radial arm resiliently cantilevered from the base portion; disk-engaging means at the inner end of the said at least one arm for releasably engaging the central hole of the disk and supporting the centre of the disk away from the base portion; the or each arm having first pivot means in the region where it joins the base portion and second pivot means radially inward of the first pivot means; the arrangement being such that depression of the disk-engaging means towards the base portion causes the inner end of the said at least one arm, and at least a central portion of the disk, to be depressed towards the base portion, the arm initially pivoting about the first pivot means and subsequently pivoting about the second pivot means until retention of the disk by the disk-engaging means is released.

According to a second aspect of the invention, there is provided apparatus for holding a compact disk having a central hole, the apparatus comprising a base portion; at least two inwardly extending radial arms resiliently cantilevered from the base portion; and disk-engaging means provided at the inner end of the

arms for releasably engaging the central hole of the disk and supporting the centre of the disk away from the base portion, the arrangement being such that depression of the disk-engaging means towards the base portion causes the inner ends of the arms, and at least a central portion of the disk, to be depressed towards the base portion until retention of the disk by the disk-engaging means is released, and the arrangement also being such that depression of the disk-engaging means causes the base portion to flex such that radially outer portions thereof are raised relative to a central area thereof so the radially outer portions engage the periphery of the disk and assist in lifting the disk away from the disk-engaging means.

According to another aspect of the invention, there is provided apparatus for holding a compact disk having a central hole, the apparatus comprising: a base portion; at least one inwardly extending radial arm resiliently cantilevered from the base portion; and disk-engaging means at the inner end of the said at least one arm for releasably engaging the central hole of the disk, the arrangement being such that the thickness of the apparatus from the top of the disk-engaging means to the underside of the base portion is 4 mm or less.

Preferred and optional features of the invention will be apparent from the following description of specific embodiments and from the subsidiary claims of the specification.

The invention will now be further described, merely by way of example, with reference to the accompanying drawings, in which:

Figure 1 is a perspective view of apparatus which can be constructed according to the invention;

Figure 2 is a plan view of the apparatus shown in Figure 1;

Figures 3, 4 and 5 are side views of the apparatus taken along line A-A in Figure 2 illustrating operation of various aspects of the present invention,

Figure 6 is a perspective view of another form of apparatus which can be constructed according to the invention; and

Figure 7 is a side view taken along line B-B of the apparatus shown in Figure 6.

Figures 1 and 2 illustrate apparatus for holding a compact disk 11 (see Figures 3, 4 and 5), the apparatus comprising a base portion 1, three inwardly extending radial arms 2 resiliently cantilevered from the base portion 1, and disk-engaging means (indicated generally at 3) at the inner ends of the arms 2 for releasably engaging the central hole of the disk. The disk-engaging means comprising a central triangular portion 4 and three sector-shaped portions 5 each connected by a hinge 5A to one side of the triangular portion 4 so, together, they provide a generally circular button-like member. Each of the sector-shaped portions is carried at the inner end of a respective arm 2 and is provided with a projection 6, or lip (see Figures 3, 4 and 5), for engaging the upper surface of a disk and, thus, retaining the disk on the apparatus.

The apparatus also has a raised portion 7 which, in use, extends around the periphery of the disk so as to limit the scope for movement of the disk within its own plane and, whilst the disk is held on the apparatus, to inhibit access to the periphery of the disk. A step 8 is provided on the inner edge of the raised portion 7. The arrangement is such that, to release a disk held on the apparatus, it is necessary to depress the button-like portion. This causes the projections 6 to depress the disk towards the base portion 1 until the periphery of the disk engages the step 8. Further depression of the button-like member causes the projections to depress the centre of the disk further towards the base portion, and so flex the disk, until the arms 2 have been depressed to such an extent that the projections 6 have moved inwardly a sufficient distance so as to disengage from the upper surface of the disk and are able to pass through

the central aperture of the disk. The disk is then free to revert to an unstressed, flat shape so the centre of the disk "pops" up above the projections 6 and so that, when the button-like member is released, the projections 6 do not re-engage the disk. The operation of the disk-engaging means and the use of disk flexing to help eject the disk in this manner are described further in WO-A-96/14636 and WO-A-97/41563.

One difference between the apparatus shown in Figures 3 to 5 and that disclosed in WO-A-96/14636 and WO-A-97/41563 is that the arms 2 are modified so that the depression of the projections 6, and their inward movement as they are depressed, occurs in two stages. The arms 2 are arranged so that each has two pivots, a first pivot 9 in the region where the arm 2 joins the base portion 1, and a second pivot 10 radially inward thereof. In the embodiment illustrated in Figures 3, 4 and 5, the second pivot comprises a projection 10 on the underside of each arm 2 towards the inner end thereof.

Figure 3 shows a cross-sectional view of the apparatus holding a disk 11 (taken along line A-A which extends along two of the arms 2). When the button-like member is pressed, each of the arms 2 initially flexes and/or pivots about the first pivot 9 in a similar manner to the apparatus described in WO-A-96/14636 and WO-A-97/41563. The arm 2 moves through an angle of about 6 degrees (about the pivot 9) during this first stage of the depression to the position shown in Figure 4. In this position, the projections 6 still firmly retain the disk 11 on the apparatus. However, the projections 10 on the underside of the arms 1 now engage a surface 12 (e.g. a desk top or table top) on which the apparatus is lying. Further depression of the button-like member thus causes the innermost portions of the arms 2 to flex and/or pivot about the second pivot 10. The innermost portions of the arms 2 and the projections 6 are thus pivoted inwards until the projections 6 disengage from the upper surface of the disk. As the disk is no longer retained by the projections 6, it is free to move away from the projections 6, e.g. by ejection due to the resilience of the disk causing the

centre of the disk 11 to move upwards as the disk reverts to an unflexed state as described above.

The projection 10 may comprise a narrow ridge extending laterally across the underside of each arm 2 and projecting from the underside thereof by a distance of 0.5 - 1.0 mm, and preferably about 0.75 mm.

When the innermost portions of the arms 2 flex and/or pivot about the second pivot 10, the projections 6 move inwardly more rapidly for a given depression of the button-like member than when the arms flex and/or pivot about the first pivot 9. Accordingly, the apparatus retains the advantages of the apparatus described in WO-A-96/14636 and WO-A-97/41563 but the thickness T of the device, i.e. the distance between the upper surface of the triangular portion 4 (in its undepressed state) and the underside of the base portion 1, can be reduced. This thickness dimension T is shown in Figure 3.

Known devices made in accordance with WO-A-96/14636 and WO-A-97/41563 have been made with a thickness in the range 4.3 - 7 mm. By using the features described in the present specification, the thickness T can be reduced to 4 mm or less and, preferably, to 3 mm or less. In the example illustrated in Figures 3 - 5, for instance, the thickness of the projections 6 (i.e. from the upper surface of the button-like member to the underside of the projections) is about 0.4 mm, the thickness of a standard CD or DVD is about 1.2 mm, the underside of the CD is held about 0.3 mm away from the upper surface of the base portion and the thickness of the base portion (from the upper surface of the step 8 to the underside of the base portion) is about 1.0 mm, giving the apparatus an overall thickness T of about 2.9 mm.

As indicated above, Figure 3 shows a disk 11 held in the apparatus prior to depression of the button 4. Figure 4 shows the position of the apparatus after the arms 2 have been depressed by 6 degrees about the first pivot point 9 and shows the depression of the centre of the disk 11 relative to the periphery of the

disk, this depression being caused by the projections 6 which still engage the upper surface of the disk in the position shown in Figure 4. Figure 5 shows the position of the apparatus, after depression of the innermost portion of the arms through a further 6 degrees about the second pivot 10, to a position in which the projections 6 have moved inwardly a sufficient distance to release their engagement on the upper surface of the disk 11 so they can pass through the central aperture of the disk. It will be seen that the projections 6 have been depressed between the position shown in Figures 3 and 5 by a distance of about 1 mm, i.e. less than the thickness of the disk. However, in practice, it is found that the momentum of the centre of the disk 11, as the disk reverts to its unflexed state, can be sufficient to lift the underside of the centre of the disk above the upper surface of the projections so that the projections 6 do not re-engage the inner wall of the aperture when the button 4 is released.

In the arrangement shown, it is also found that further depression of the button 4 in the position shown in Figure 5, causes the base portion 1 to flex so that radially outer portions thereof, including the step 8, are raised relative to the central area thereof, whereby the radially outer portions engage the periphery of the disk 11 and assist in lifting the disk away from the projections 6. Thus, depression of the button 4 in the position shown in Figure 5 causes the step 4 to rise and so help lift the disk away from the disk-engaging means. Such flexing of the base portion is believed to arise due to a tilting or see-saw action about the first and/or second pivot; as the inner end of the arm is depressed, there is a tendency for parts of the base portion radially outward of the pivot(s) to rise as, although the arm may flex to some extent at the pivot, the material is sufficiently stiff to transmit downward motion of the arm on one side of the pivot to upward motion of the base portion on the other side of the pivot. It is also believed that tension induced in the upper surface of the base portion 1 as the button 4 is further depressed assists in causing the base portion to flex in this manner. This is believed to be enhanced by the fact that the button 4 is connected via the hinges 5A to the arms 2 and hence to the base portion 1. However, such

flexing of the base portion may not be dependent upon the button portions being connected by said hinges.

As will be appreciated from Figures 3 to 5, the initial movement of the arm 2 about the first pivot point 9 comprising some flexing of the connection between the arm 2 and the base portion 1 so the angle therebetween is reduced (compare Figure 4 to Figure 3) as well as some pivoting about the angular corner between the arm 2 and the base portion 1 on the underside of the apparatus. The movement about the second pivot point 10 may also comprise some flexing of the angle between the innermost portion of the arm and the portion between the pivot points 9 and 10, but, due to the narrow ridge-like shape of the projection 10, movement about pivot 10 is predominantly caused by pivoting of the arm 2 about the fulcrum provided by projection 10 which tends to cause the portions of the arm 2 and base portion 1 radially outward thereof to rise as the innermost portion of the arm is depressed.

The pivoting movement about the first pivot 9 is enhanced by the use of a shorter arm 2 which, in the position shown in Figure 3, is therefore angled upwards at a steeper angle relative to the base portion 1 compared to apparatus with longer arms 2. This pivoting action at the first pivot 9 can also be further enhanced by the provision of a projection (not shown), such as a lateral ridge, on the underside of the apparatus in the region where the arm 2 joins the base portion 1. This projection need only project from the underside of the apparatus by a small distance, e.g. 0.5 mm or less.

The projection 10 preferably projects from the underside of the arms 2 by a distance in the range 0.5 mm – 1.0 mm.

These features, either individually or together, thus help ensure the disk is "cleanly" released when the button 4 is depressed even though the apparatus has a thickness T of less than 3 mm.

Figure 6 shows a perspective of another version of apparatus for holding a compact disk. This is similar to that shown in Figures 1-5 except that the disk engaging means comprises two inwardly extending radial arms 2A and semi-circular portions 5A at the inner ends thereof which together form a generally circular button-like member 3A. Each of the semi-circular portions is provided with a projection 6A, or lip (see Figure 7) for engaging the upper surface of a disk and thus retaining the disk on the apparatus. This apparatus functions in essentially the same manner as described above for the three-arm version of the apparatus. As shown in Figures 6 and 7 the semi-circular portions 5A need not be interconnected by a hinge but, in some cases, it may be desirable for the two portions to be interconnected, e.g. by a hinge. The two portions 5A may also have other shapes which, together, form a generally circular button-like member.

Figure 7 shows a cross sectional view of the apparatus shown in Figure 6 taken along line B-B thereof. This view shows the apparatus in a position in which the button-like member 3A is partially depressed (and flexing of the disk 11 caused thereby is shown in Figure 7) but not depressed to the extent that projections 10A on the undersides of the arms 2A have yet engaged the surface 12 on which the apparatus is supported. The peripheral portions of the disk 11 are shown supported by an inclined surface 13 which provides a similar function to the step 8 described above in relation to Figures 1 to 5

Each of the arms 2A in the embodiment shown in Figures 6 and 7, initially flexes and/or pivots about a first pivot 9A where the arm joins the base portion, and subsequently, about a second pivot provided by a projection 10A on the underside of the arm 2A radially inward of the pivot 9A, as the button 3A is depressed in a similar manner to that described above in relation to the embodiment shown in Figures 1 to 5.

A number of other changes can be made to the apparatus to help reduce the thickness of the apparatus and are described below.

The scope for downward movement of the centre of the disk 11 can be increased, without increasing the thickness T of the apparatus, by reducing the thickness of the central area of the base portion 1. Thus, the thickness of the base portion may be tapered so it reduces in a radially inward direction from the step 8 to a region at a radius of about 7.5 mm from the centre of the device. Indeed, the base portion may taper gradually from a thickness of about 1.0 mm adjacent the periphery of the disk to a thickness of about 0.7 mm adjacent the periphery of the central aperture of the disk, without the need for an abrupt change of thickness to provide the step 8. Making the central area of the base portion thinner than the outer areas thereof also tends to encourage the base portion to flex so the outer areas rise when the button 3 is depressed.

The thickness T of the apparatus can also be reduced by adjusting the length of the arms 2,2A the size of the projections 6,6A and the thickness of the button 3,3A.

The projections 6, 6A move inwards more rapidly if the distance between the projections 6, 6A and the first pivot 9,9A is reduced. In the arrangement shown, the first pivot 9,9A is preferably 15 mm or less from the centre of the apparatus but more preferably 12.5 mm or less therefrom. The second pivot means 10,10A is preferably at least 3 mm and most preferably at least 5 mm radially inward of the first pivot means 9,9A.

If the overlap between the projections 6,6A and the upper surface of the disk 11 (in the undepressed state) is reduced, the projections 6,6A will need to move inwardly a smaller distance to release their engagement on the upper surface of the disk 11. On the other hand, the overlap should be sufficient to provide positive retention of the disk (and to allow for minor variations in the radius of the aperture of different disks). The projections 6,6A preferably overlap the upper surface of the disk 11 (with the apparatus in the undepressed state) by

0.5 mm or less, and preferably 0.4 mm or less, but the minimum overlap is preferably 0.2 mm.

The button 3,3A is preferably flat and preferably has a thickness of 0.6 mm or less and most preferably 0.4 mm or less. However, it should preferably have a minimum thickness of about 0.2 mm otherwise, the projections 6,6A may become too weak or flexible.

As indicated above, there are several features which assist in ejecting the disk so that it 'pops up' when released from the engagement by the lips 6 and is not re-engaged thereby when the button 3 is released: flexing of the centre of the disk downwards causes the centre of the disk to rise again once the engagement of the lips is released; during this reversion of the disk to its unflexed state, the centre of the disk may rise past its initial position (shown in Figure 3) due to momentum of the centre of the disk; and upward flexing of the outer regions of the base portion assists in lifting the disk.

In some embodiments, all these factors may contribute to ejection of the disk. However, as the thickness of the apparatus is reduced (described further below), the movement caused by the upward flexing of outer portions of the base portion may change from merely assisting in ejection of the disk to becoming of equal importance to the ejection caused by flexing of the disk and, in some cases, flexing of the base portion may be essential to ensure satisfactory ejection of the disk.

The features described above thus enable the thickness of the apparatus to be reduced. This is an advantage as there is a desire to produce slimmer packaging to enable more disks to be stored in a given space. However, it will be appreciated that the features described may also be used to improve the functioning of the apparatus without necessarily reducing the thickness thereof.

As described in WO-A-96/14636 and WO-A-97/41563, the raised portion or upstand 7 surrounds or partially surrounds the periphery of the disk so as to inhibit access to the edge of a disk held on the apparatus by a user's finger until the disk is released from the disk-engaging means 3,3A. This deters users from attempting to remove the disk by lifting the edge of the disk and encourages them to release the disk by operating the disk-engaging means.

Parts of the raised portion or upstand 7 may be of reduced height to facilitate access to the edge of the disk once it has been released from the disk-engaging means.

The apparatus is preferably arranged so it can be manufactured by a one-shot injection moulding process. In particular, apertures are provided in the arms 2,2A to enable the projections or lips 6,6A to be formed during such a process.

The apparatus may be integrally formed as a wall of a container or box and, in this case, is typically formed of an amorphous plastics material such as polyethylene. However, the apparatus may also be formed as a tray for insertion in a separate container, or for mounting in a cover or sleeve in which case it is typically formed of a crystalline plastics material such as polystyrene or a co-polymer of polystyrene and butadiene. Such a tray may also be provided with a removable cover or film.

The apparatus shown in Figures 1 and 6 are in the form of a tray for insertion into a container, mounting within a cover or a sleeve or sealing with a removable cover or film. As shown, a further upstand 14 is provided around the periphery of the apparatus.

As indicated above, the apparatus is designed so that it can be made with a thickness T of 4mm or less and preferably 3mm or less. In the latter case, the apparatus e.g. when in the form of a tray as shown in Figures 1 or 6, may be mounted within a cardboard cover which is adhered to the underside of the

apparatus, extends around one edge of the apparatus and extends across the upperside of the apparatus, and the overall thickness of the device, including the thickness of the cardboard cover above and below the tray, may be 4 mm or less.

CLAIMS

1. Apparatus for holding a compact disk having a central hole, the apparatus comprising: a base portion; at least one inwardly extending radial arm resiliently cantilevered from the base portion; disk-engaging means at the inner end of the said at least one arm for releasably engaging the central hole of the disk and supporting the centre of the disk away from the base portion; the or each arm having first pivot means in the region where it joins the base portion and second pivot means radially inward of the first pivot means; the arrangement being such that depression of the disk-engaging means towards the base portion causes the inner end of the said at least one arm, and at least a central portion of the disk, to be depressed towards the base portion, the arm initially pivoting about the first pivot means and subsequently pivoting about the second pivot means until retention of the disk by the disk-engaging means is released.
2. Apparatus as claimed in Claim 1 in which the second pivot means comprises a projection on the underside of the, or each, radial arm.
3. Apparatus as claimed in Claim 2 in which the projection comprises a ridge extending laterally across the underside of the, or each, radial arm.
4. Apparatus as claimed in Claim 2 or 3 in which the projection projects from the underside of the, or each, radial arm by a distance of 0.5 - 1.0 mm.
5. Apparatus as claimed in any preceding claim in which the second pivot means is at least 3 mm, and preferably at least 5 mm, radially inward of the first pivot means.
6. Apparatus as claimed in Claim 1, 2 or 3 in which the disk-engaging means comprises projections, or lips, for engaging the upper surface of a disk held thereon.

7. Apparatus as claimed in Claim 6 in which the projections, or lips, are arranged so as to overlap the upper surface of a disk held thereon by a distance in the range 0.2 to 0.5 mm.
8. Apparatus as claimed in any preceding claim in which the first pivot means of the or each arm is at a distance from the centre of the apparatus of 15 mm or less, and preferably 13 mm or less.
9. Apparatus as claimed in any preceding claims comprising two or three radial arms.
10. Apparatus as claimed in Claim 9 in which the inner ends of the arms form a button-like member for depression by a user's finger.
11. Apparatus as claimed in Claim 10 in which each arm has a portion of the button-like member provided at its inner end, the portions being interconnected.
12. Apparatus as claimed in any preceding claim arranged such that further depression of the disk-engaging means following pivoting about the second pivot means causes the base portion to flex so that radially outer portions thereof rise relative to a central area thereof and so assist in lifting the disk away from the disk-engaging means.
13. Apparatus as claimed in any preceding claim in which a central area of the base portion is thinner than radially outer portions thereof to enable the centre of the disk to be depressed further.
14. Apparatus as claimed in any preceding claim comprising a peripheral support for supporting the periphery of a disk when the disk-engaging means is initially depressed, whereby further depression of the disk-

engaging means, and hence of a central area of the disk, causes the centre of the disk to be flexed towards the base portion.

15. Apparatus as claimed in any preceding claim comprising an upstand provided on the base portion for surrounding, or partially surrounding, the periphery of a disk held thereon so as to inhibit access to the edge of the disk by a user's finger until the disk has been released from the disk-engaging means.
16. Apparatus as claimed in any preceding claim formed of plastics material.
17. Apparatus as claimed in Claim 16 arranged to enable it to be formed by a one-shot injection moulding process.
18. Apparatus as claimed in Claim 16 integrally formed as part of a container.
19. Apparatus as claimed in Claim 17 formed as a tray for providing with a cover or insertion into a container.
20. Apparatus for holding a compact disk having a central hole, the apparatus comprising a base portion; at least two inwardly extending radial arms resiliently cantilevered from the base portion; and disk-engaging means provided at the inner end of the arms for releasably engaging the central hole of the disk and supporting the centre of the disk away from the base portion, the arrangement being such that depression of the disk-engaging means towards the base portion causes the inner ends of the arms, and at least a central portion of the disk, to be depressed towards the base portion until retention of the disk by the disk-engaging means is released, and the arrangement also being such that depression of the disk-engaging means causes the base portion to flex such that radially outer portions thereof are raised relative to a central area thereof so the radially outer

portions engage the periphery of the disk and assist in lifting the disk away from the disk-engaging means.

21. Apparatus as claimed in claim 20 in which said flexing of the base portion is enhanced by forming each of radial arms so that it joins the base portion at a pivot point which is arranged such that depression of the arm tends to cause radially outer portions of the base portion to rise rather than just flexing the arm relative to the base portion.
22. Apparatus for holding a compact disk having a central hole, the apparatus comprising: a base portion; at least one inwardly extending radial arm resiliently cantilevered from the base portion; and disk-engaging means at the inner end of the said at least one arm for releasably engaging the central hole of the disk, the arrangement being such that the thickness of the apparatus from the top of the disk-engaging means to the underside of the base portion is 4mm or less.
23. Apparatus as claimed in claim 22 mounted within a cover, in which the overall thickness, including the thickness of the cover, is 4mm or less.
24. Apparatus for holding a compact disk substantially as hereinbefore described with reference to Figures 3 to 5 of the accompanying drawings.

1/5

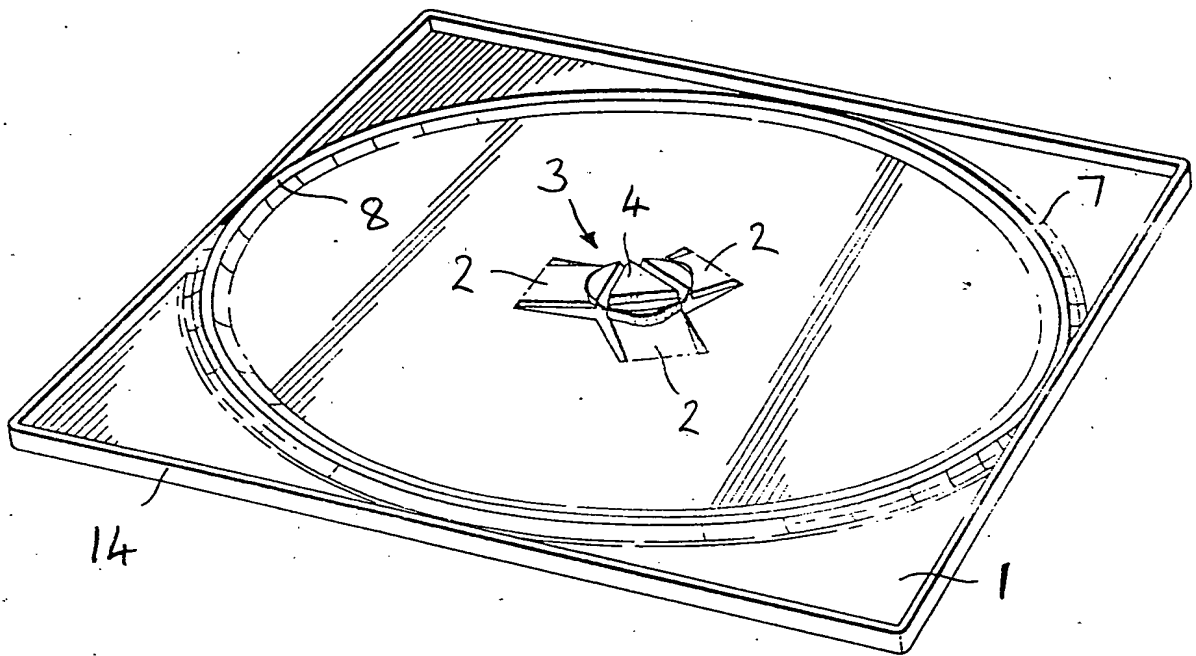


Fig.1



2/5




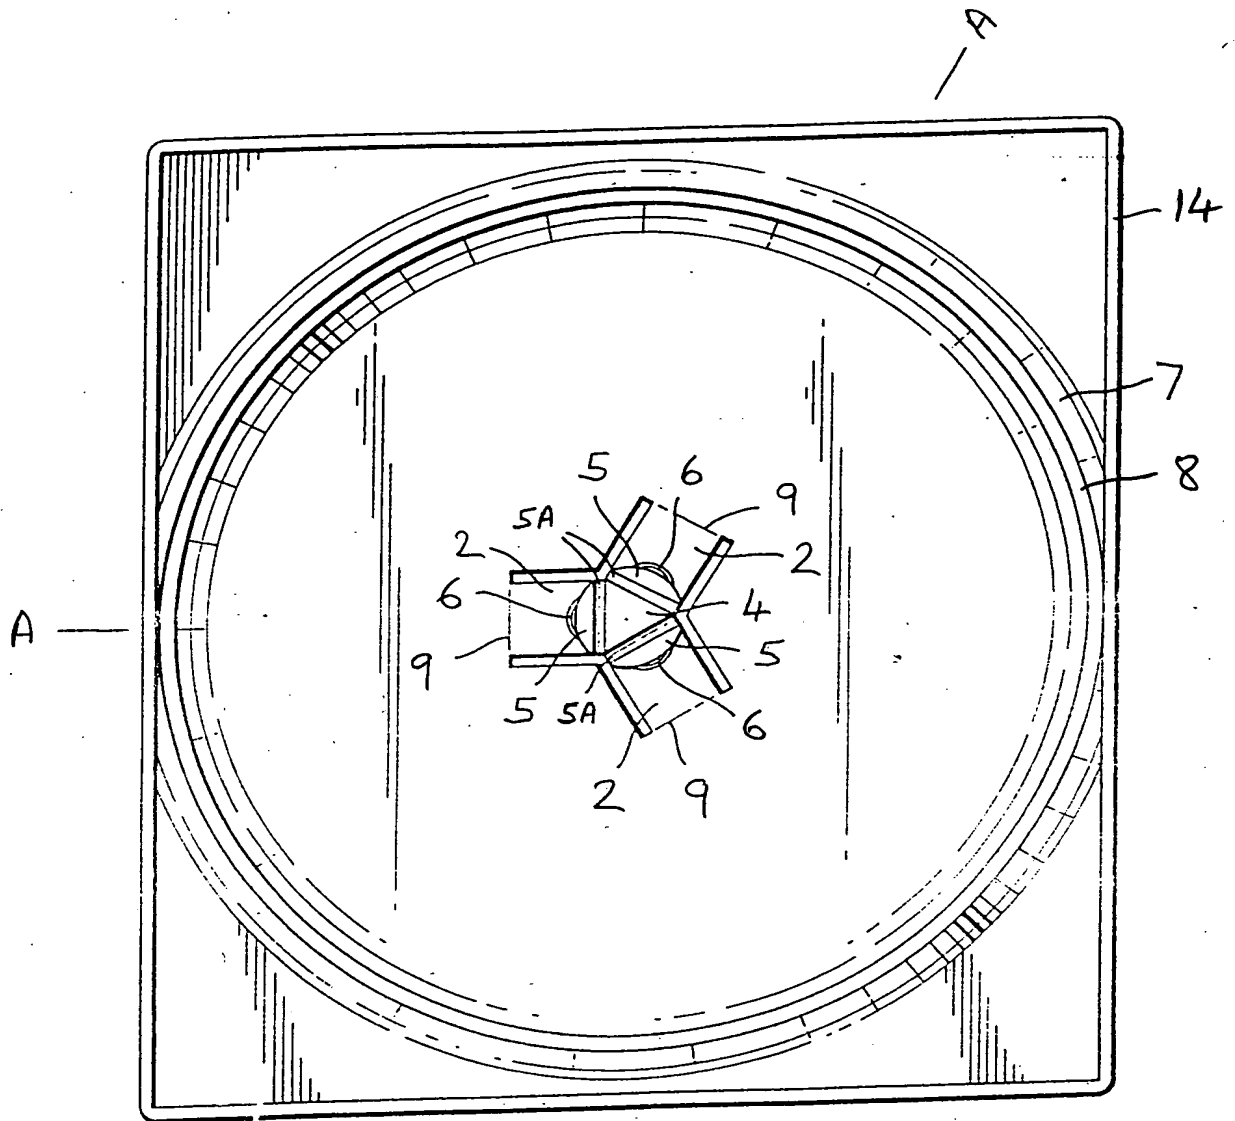


Fig. 2

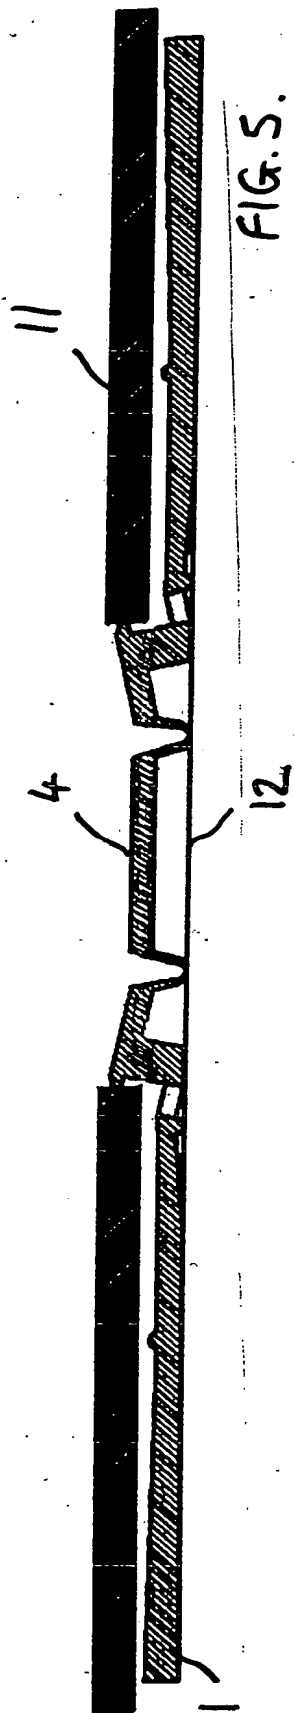

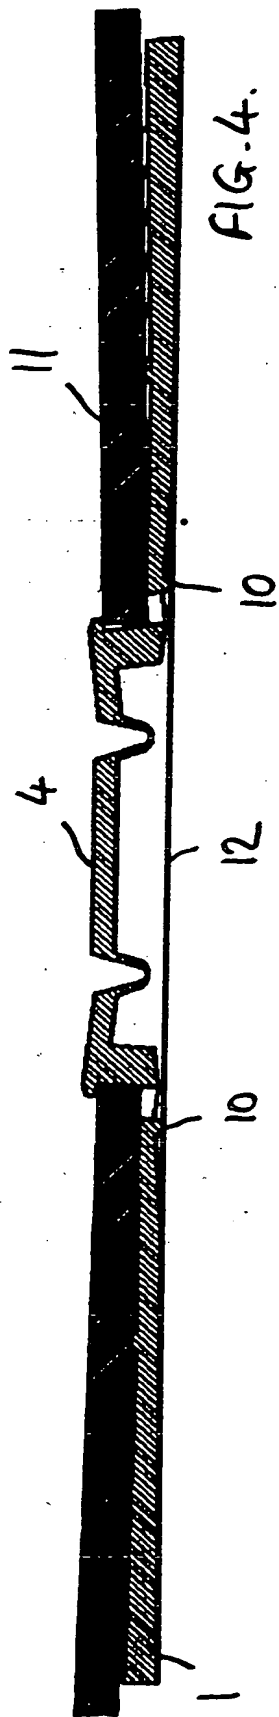

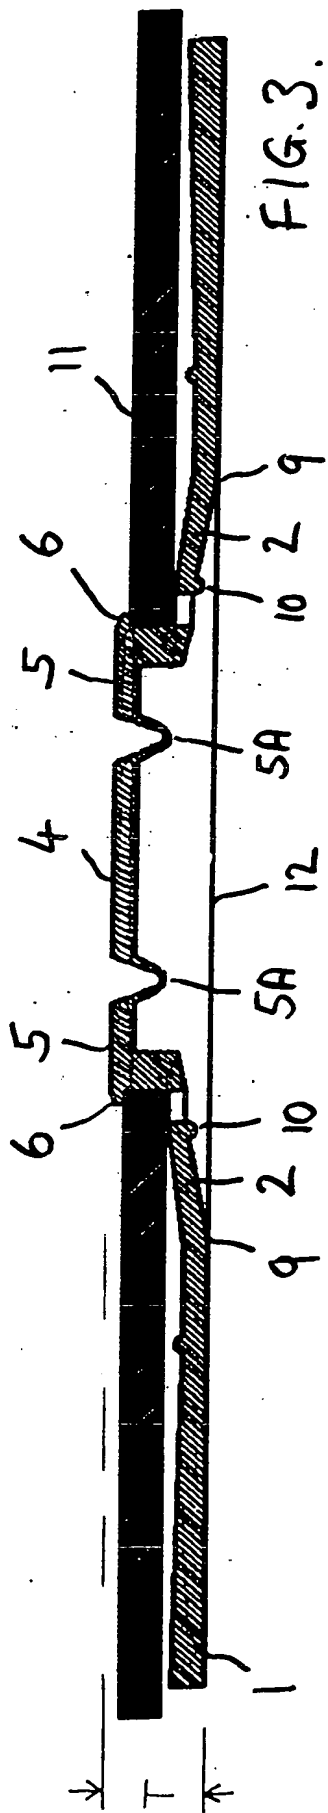

415

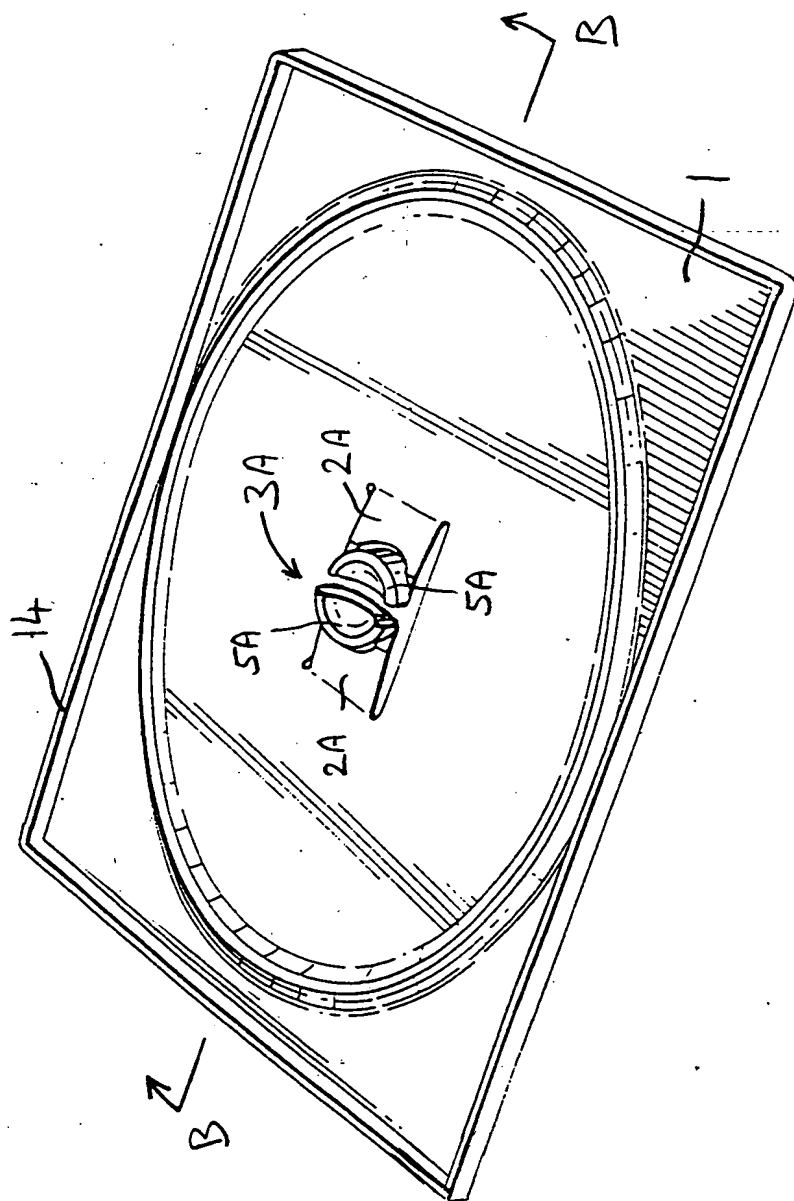


FIG. 6



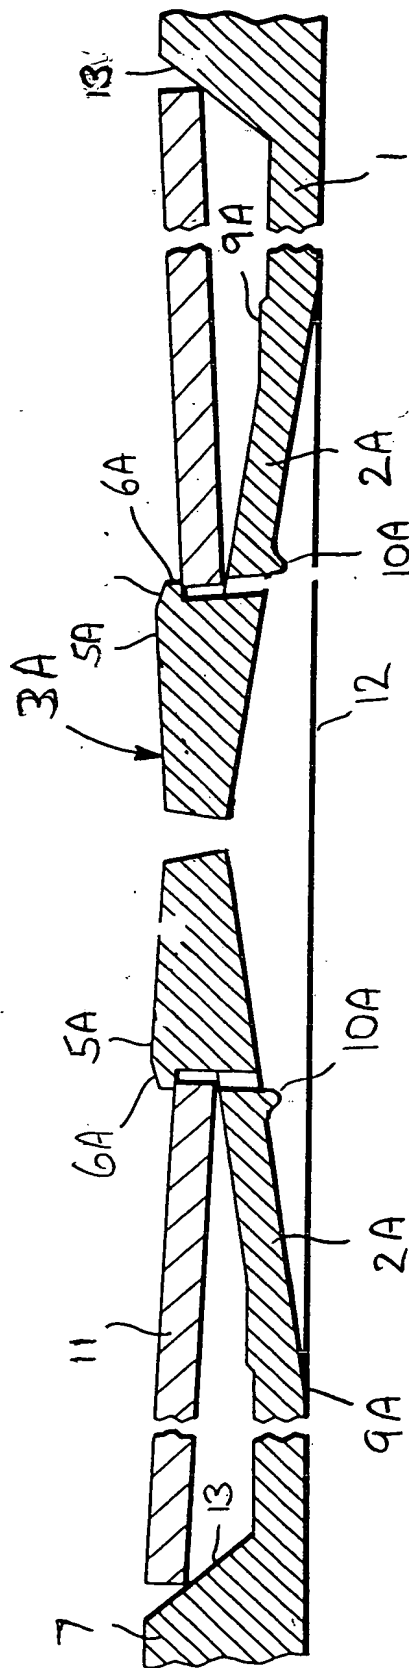


Fig. 7

